HYVA®
We move your world

SERVICE CRANES

BUILT FOR SERVICE

hyva.com

We move your world

Hyva Service Cranes are light weight, versatile and state of the art with capacities of 3000 lbs. to 14,000 lbs. and many options and configurations.

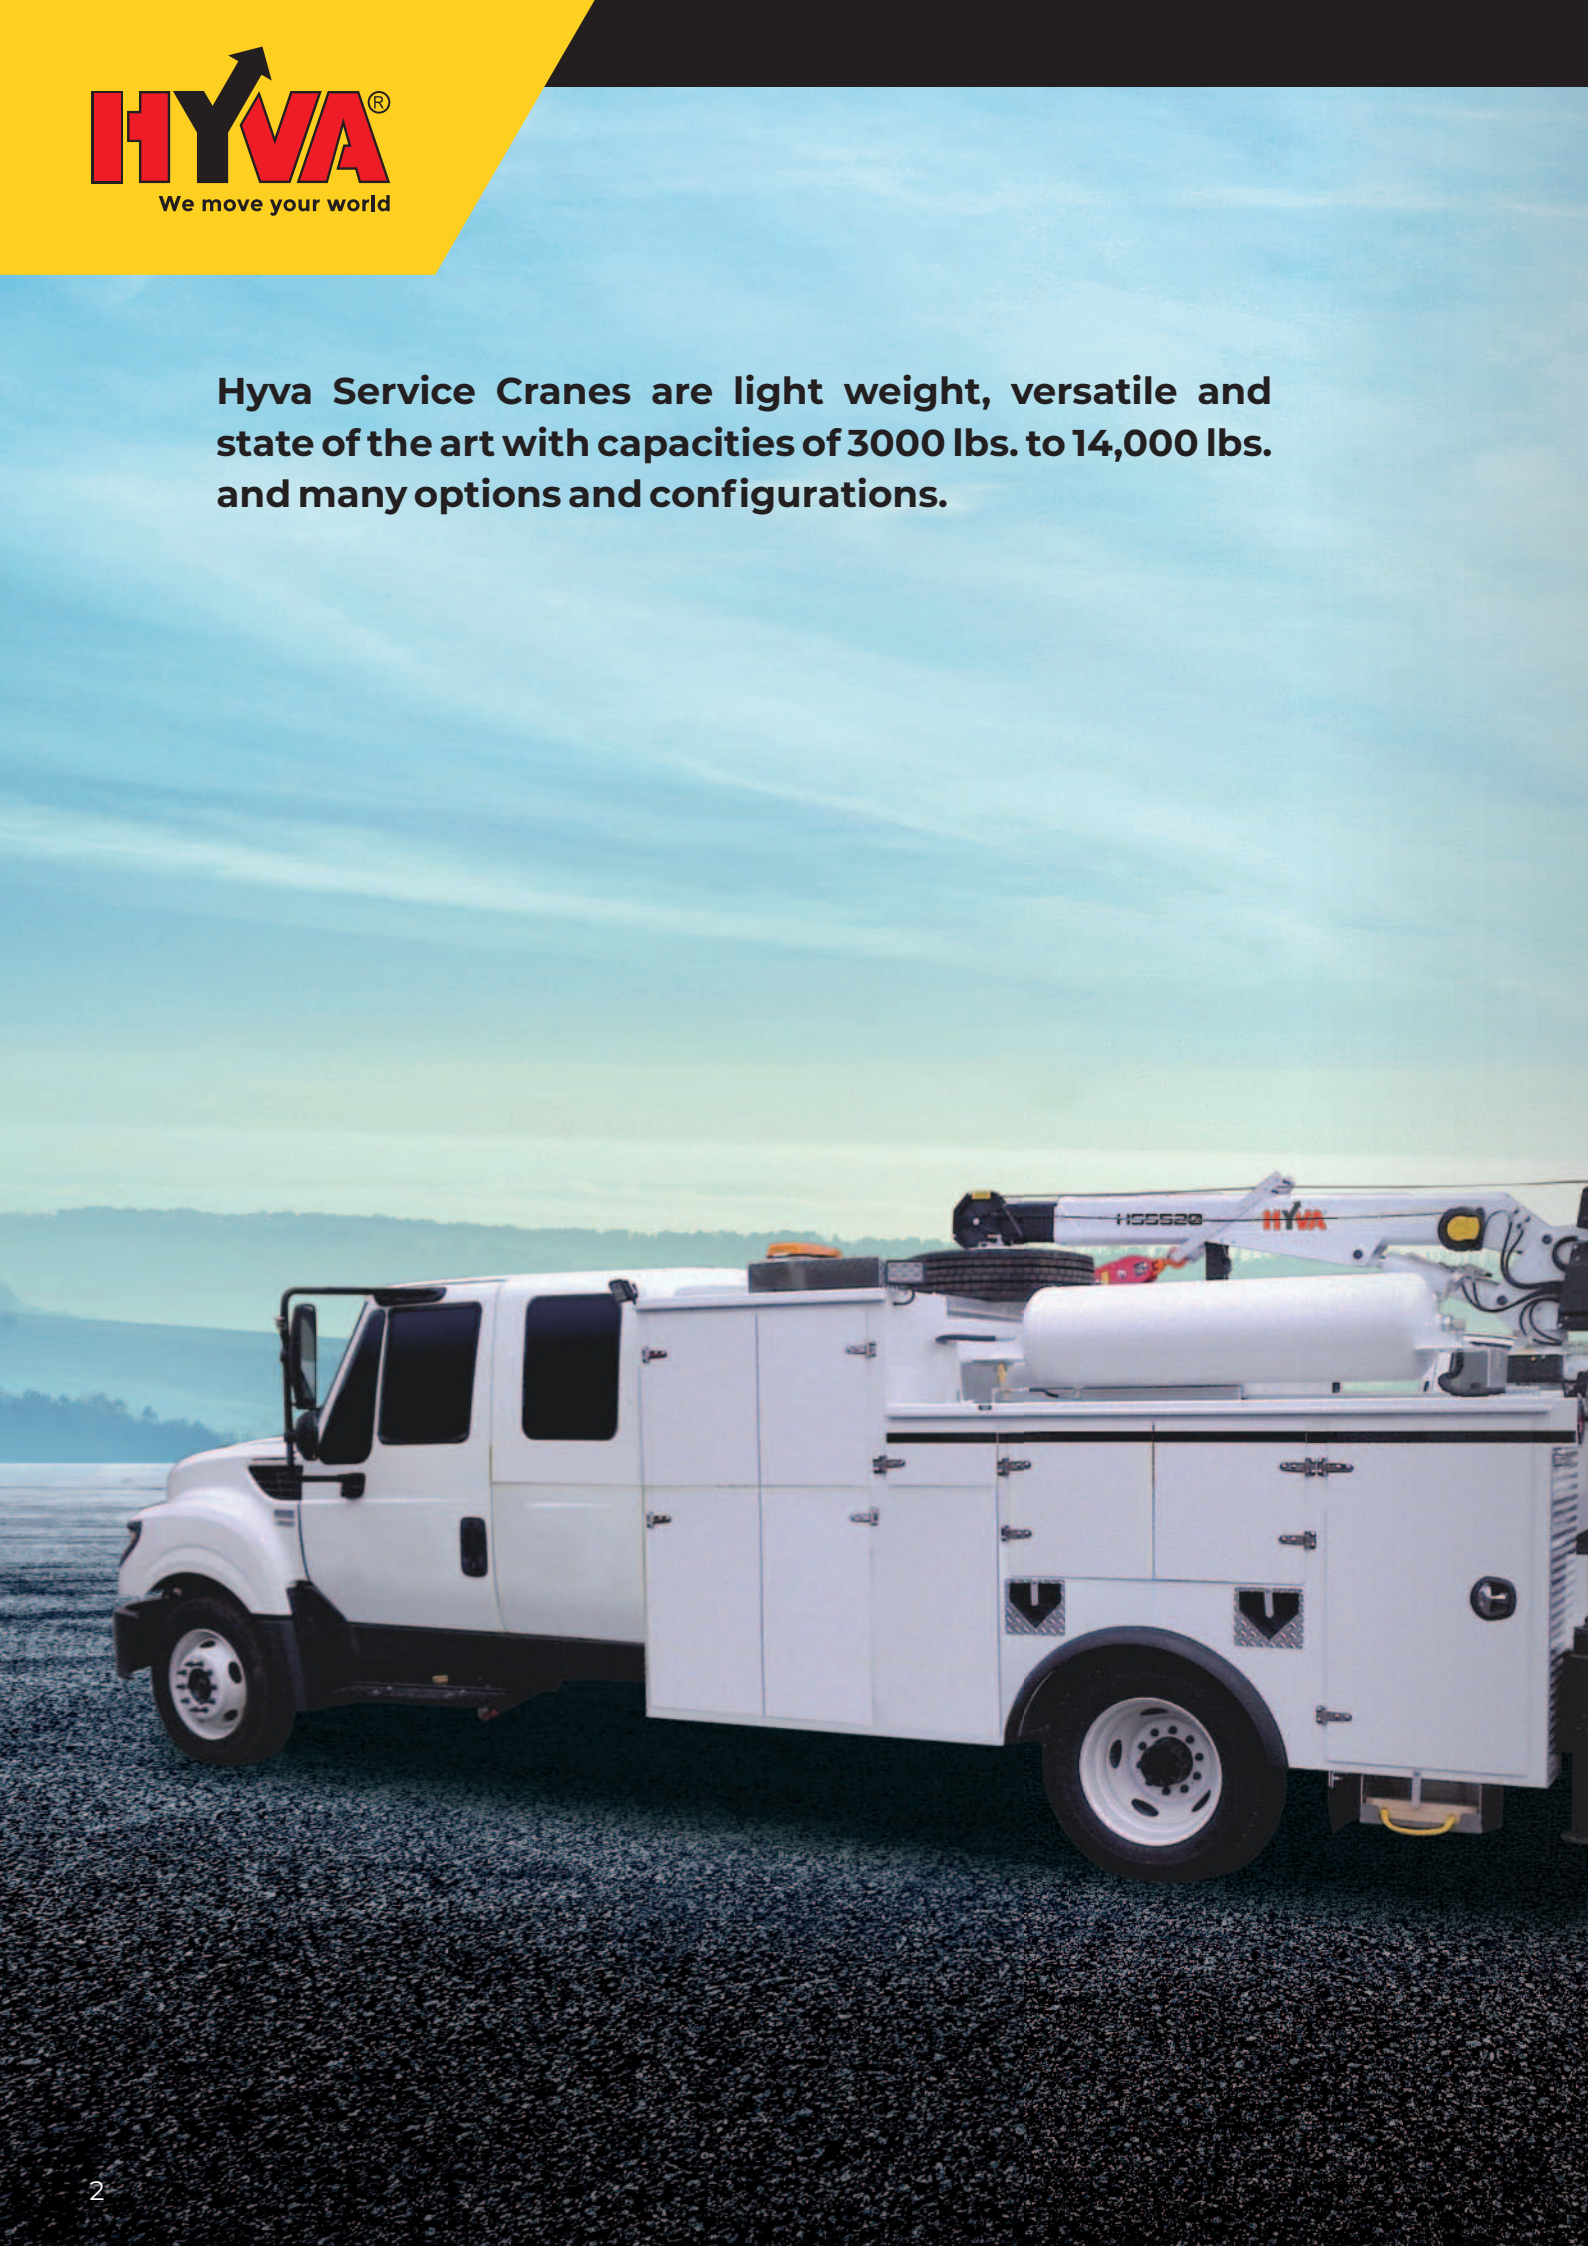

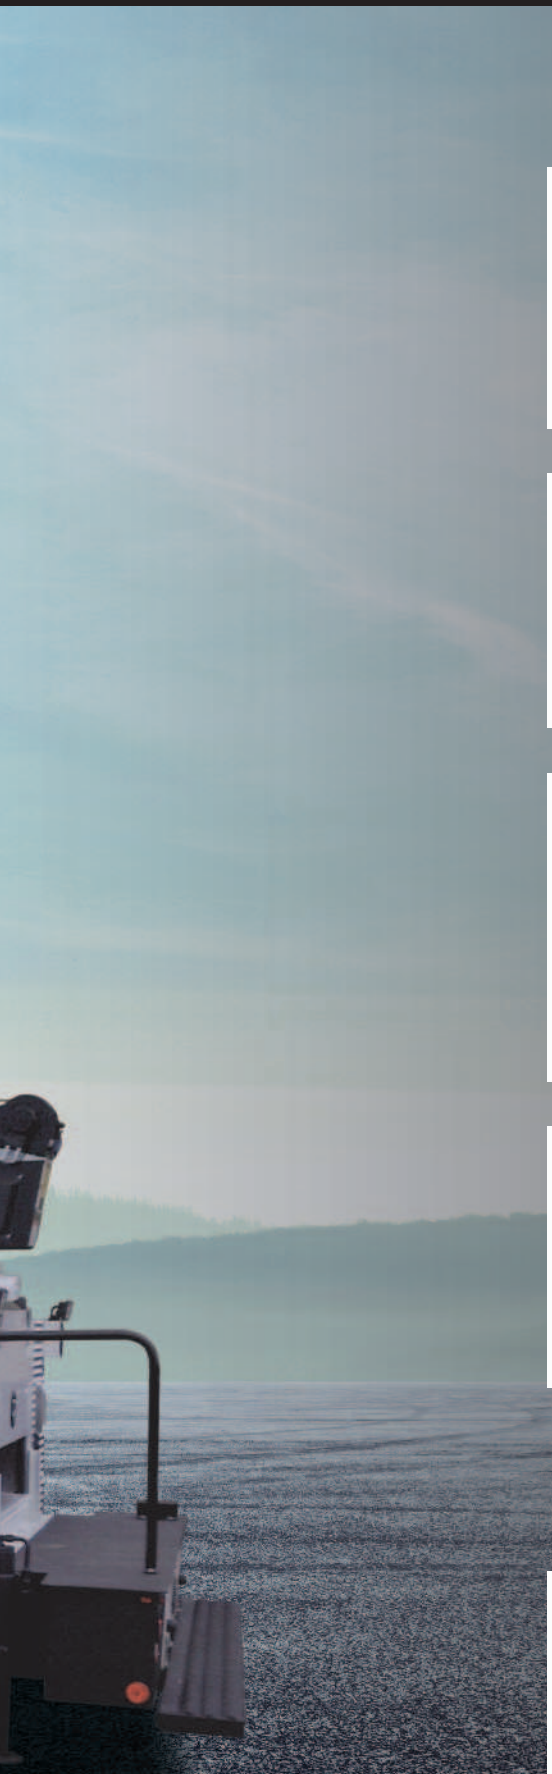

ADVANTAGES

❶ LIGHT WEIGHT

Hyva service cranes weigh up to 80% less than competitor models which means higher payloads and better fuel economy.

❷ PRECISION

With lifting capacities from 3,200 lbs. to 14,000 lbs. and available reach up to 28', you're certain to get the crane that works best for you.

❸ BETTER ROTATION

Get the job done quicker! Cranes with capacities of 5,000 lbs. and up feature 360 degree continuous rotation. Cranes under 5,000 lbs. capacity rotate to 400 degrees.

❹ VALUE RETENTION

Numerous options, advanced safety features and superior strength-to-weight ratios guarantee there is a Hyva Service Crane perfect for your job.

FEATURES

- Exceptional components, materials and design
- Programmable cable or radio remote controls
- Overload protection with transducer on load-limiting device
- LED display w/safety checks and diagnostics
- Emergency manual override on all solenoid valves
- Mounting and maintenance kits with every crane
- Anti-two block and empty drum rope stop
- Non-rotating winch rope
- Nitrided boom pins
- Overcenter valve on all cylinders

HYDRAULIC CRANES

TECHNICAL DATA

Model	Crane Rating (ft lb)	Nr. Of telescopic hydraulic extensions	Planetary gear winch		Patented pull line limiter system	Rotation	Digital processor LED display	Digital proportional remote control unit	A2B system		A2B & counter weight storage	Crane weight (lb)
			Hydraulic & high speed	Electrical					Mechanical	Electrical		
HS3315 E1 H	11.500	1 +1 manual	✗	✓	✗	400°	✓	✗	✗	✓	✗	510
HS4416 E1 H	16.000	1 +1 manual	✓	✗	✓	400°	✗	✓	✓	✗	✓	750
HS4416 E2 H	16.000	2	✓	✗	✓	400°	✗	✓	✓	✗	✓	780
HS4420 E1 H	16.000	1 +1 manual	✓	✗	✓	400°	✗	✓	✓	✗	✓	790
HS4420 E2 H	16.000	2	✓	✗	✓	400°	✗	✓	✓	✗	✓	825
HS5520 E2 H	25.000	2	✓	✗	✓	Continuous non-stop	✗	✓	✓	✗	✓	1.080
HS6621 E2 H	38.600	2	✓	✗	✓	Continuous non-stop	✗	✓	✓	✗	✓	1.300
HS8022 E2 H	50.000	2	✓	✗	✓	Continuous non-stop	✗	✓	✓	✗	✓	1.500
HS8028 E2 H	47.000	2	✓	✗	✓	Continuous non-stop	✗	✓	✓	✗	✓	1.760
HS11022 E2 H	61.400	2	✓	✗	✓	Continuous non-stop	✗	✓	✓	✗	✓	1.900
HS11028 E2 H	61.400	2	✓	✗	✓	Continuous non-stop	✗	✓	✓	✗	✓	1.980
HS14028 E2 H	78.800	2	✓	✗	✓	Continuous non-stop	✗	✓	✓	✗	✓	2.460

HS3315 E1 H MAX CAPACITY : lb 3,200 *(kg 1.450)*



HS4416 E1 H MAX CAPACITY : lb 4,400 *(kg 2.000)*



HS4416 E2 H MAX CAPACITY : lb 4,400 *(kg 2.000)*



HS4420 E1 H MAX CAPACITY : lb 4,400 *(kg 2.000)*



HS4420 E2 H MAX CAPACITY : lb 4,400 *(kg 2.000)*



HS5520 E2 H MAX CAPACITY : lb 5,100 *(kg 2.300)*



HS6621 E2 H MAX CAPACITY : lb 6,610 *(kg 3.000)*



HS8022 E2 H MAX CAPACITY : lb 8,150 *(kg 3.700)*



HS8028 E2 H MAX CAPACITY : lb 8,150 *(kg 3.700)*



HS11022 E2 H MAX CAPACITY : lb 11,020 *(kg 5.000)*



HS11028 E2 H MAX CAPACITY : lb 11,020 *(kg 5.000)*



HS14028 E2 H MAX CAPACITY : lb 14,000 *(kg 6.350)*



Standard manual extensions

ELECTRO-HYDRAULIC CRANES

TECHNICAL DATA

Model	Crane Rating (ft lb)	Nr. Of telescopic hydraulic extensions	Planetary gear winch		Patented pull line limiter system	Rotation	Digital processor LED display	Digital proportional remote control unit	A2B system		A2B & counter weight storage	Crane weight (lb)
			Hydraulic & high speed	Electrical					Mechanical	Electrical		
HS3315 E1 E	11.500	1 +1 manual	✓	✗	✗	400°	✓	✗	✗	✓	✗	550
HS4416 E1 E	16.000	1 +1 manual	✓	✗	✓	400°	✗	✓	✓	✗	✓	790
HS4416 E2 E	16.000	2	✓	✗	✓	400°	✗	✓	✓	✗	✓	825
HS4420 E1 E	16.000	1 +1 manual	✓	✗	✓	400°	✗	✓	✓	✗	✓	840
HS4420 E2 E	16.000	2	✓	✗	✓	400°	✗	✓	✓	✗	✓	870
HS5520 E2 E	25.000	2	✓	✗	✓	Continuous non-stop	✗	✓	✓	✗	✓	1.060

HS3315 E1 E MAX CAPACITY : lb 3,200 *(kg 1.450)*



HS4416 E1 E MAX CAPACITY : lb 4,400 *(kg 2.000)*



HS4416 E2 E MAX CAPACITY : lb 4,400 *(kg 2.000)*



HS4420 E1 E MAX CAPACITY : lb 4,400 *(kg 2.000)*



HS4420 E2 E MAX CAPACITY : lb 4,400 *(kg 2.000)*



HS5520 E2 E MAX CAPACITY : lb 5,100 *(kg 2.300)*



Standard manual extensions

HYVA®
We move your world

ONE CRANE, SERVICING MANY APPLICATIONS

AGRICULTURE
CONSTRUCTION
MINING
MUNICIPALITY
OIL & GAS
RENTAL

OUTRIGGERS

Full range of outriggers available for every model.

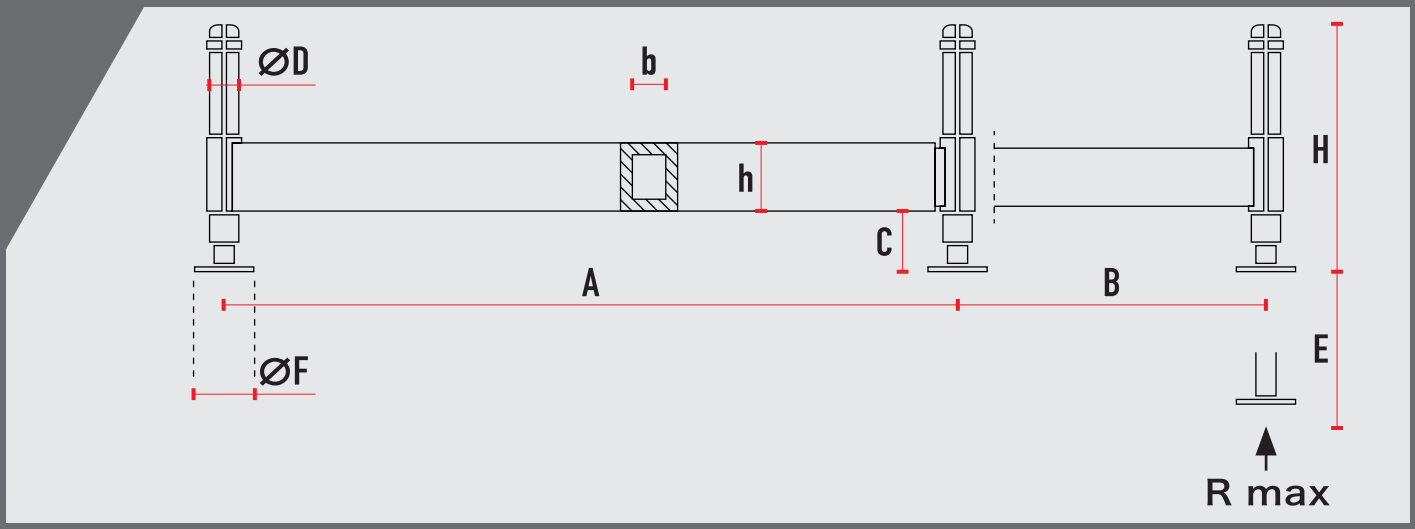

TECHNICAL DATA

	Outrigger type	For cranes	R max lb	A in	B in	C in		D in	E in	F in	H in	h x b in	Weight lb
						min.	max.						
Manual In/Out Manual Up/Down	S MM	HS3315 / HS4416 / HS4420	5,060	86"	39 3/8"	3 1/8"	16 3/16"	16 3/16"	17 1/2"	5 1/8"	26"	6 9/32"x 4"	214
Manual In/Out Hydraulic Up/Down	S MH	HS3315 / HS4416 / HS4420	5,060	86"	39 3/8"	7"	19"	2 3/4"	15 5/16"	6"	26 1/2"	6 9/32"x 4"	254
	M MH	HS5520 / HS6621 / HS8022 / HS8028	13,200	87 19/32"	39 3/8"	8 1/2"	19 1/2"	3 3/8"	17 29/32"	6"	28 3/8"	8"x 4"	415
Hydraulic In/Out Hydraulic Up/Down	M HH	HS5520 / HS6621 / HS8022 / HS8028	13,200	87 19/32"	39 3/8"	8 1/2"	19 1/2"	3 3/8"	17 29/32"	6 5/16"	28 3/8"	8"x 4"	445
	L HH	HS8020 / HS8028 / HS11022 / HS11028	15,400	86"	39 3/8"	7 7/8"	23 5/8"	3 3/4"	21 3/4"	7 3/4"	32 3/16"	8"x 4 13/16"	538
	XL HH	HS11022 / HS11028 / HS14028	24,700	93 29/32"	39 3/8"	7 17/32"	23 1/32"	4 23/32"	21 21/32"	7 7/8"	32 5/32"	8 21/32" x 4 7/8"	600

S **M** **M**

Stabilizers Extension: **M = Manual; H = Hydraulic**
Crossbeam Extension: **M = Manual; H = Hydraulic**
Outriggers' class **(S; M; L; XL)**

HYVA®
We move your world

Tipping Solutions | Container Handling | Waste Handling | Cranes

130 countries
2,500 employees
25,000 customers
37 subsidiaries
12 production facilities

Hyva is a leading provider of innovative and highly efficient transport solutions for commercial vehicles used in transport, construction, mining, materials handling and environmental service industries.

Founded in 1979 in the Netherlands, the company has a global presence with 37 fully owned subsidiaries, extraordinary service coverage and 12 manufacturing facilities in Brazil, China, Europe and India.

For more information on Hyva, please visit www.hyva.com

or follow us on:

Hyva (U.S.A) Corporation
864 Lively Blvd,
Wood Dale, Illinois 60191, USA
Phone: +1-630-227-9020
Fax: +1-630-227-9029
sales@hyvausa.com
www.hyva.com

LLOYD'S REGISTER · LRQA
ISO 9001 · ISO 14001
Quality and environmental certified

DEALER STAMP

Disclaimer: Products shown in this brochure might be partially equipped and may not correspond to the standard version.
Country-specific regulations must be observed. Dimensions may vary. This brochure could be subjected to technical changes, errors and translation mistakes.

PG-U 00000380 / 18-10-2018 / RV AA