1206 VERSA EXPRESS-TRAILER

SPECIFICATIONS	
Working Height (m)	12
Horizontal reach (m)	6
Platform capacity (Kg)	250 (2 man)
Total width (m)	1,8
Total weight (Kg)	1450
Total stowed height (m)	2,2
Total stowed length (m)	4,5
Power source	Diesel motor or petrol motor, deep cycle batteries or 220v plug in or a combination of either diesel/electric or petrol/electric etc.
Stabilizers	4x hydraulic extendable stabilizers with leg lock valve
Rotation	360 degree non-continuous
Brake	1.8 ton rubberide axle

- Hydraulic operated control valve from both the ground and in the cage
- Manual overide in the event of system failure
- Spare wheel

DESIGNED AND FABRICATED ACCORDING TO SANS 16368

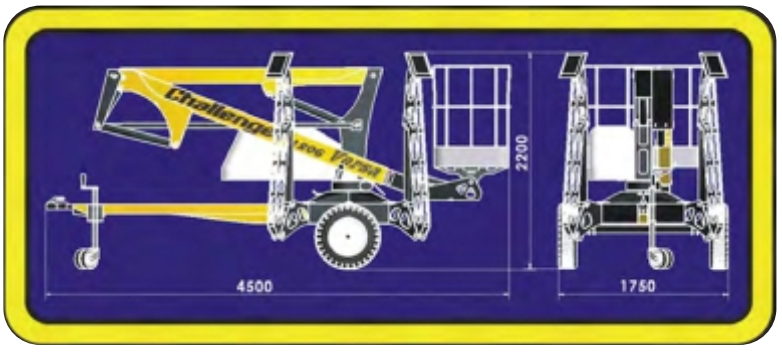

PG-E ZA-AC 1206 TR/29-10-19/RVAB

hyva.com

HYVA SOUTHERN AFRICA (PTY) LTD.
178 Barbara Rd, Rietfontein 63-Ir, Germiston, 1401, Johannesburg, South Africa
T: +27 (0) 11 822 1446, E: enquiries.sa@hyva.com