1206 VERSA EXPRESS-TRUCK

SPECIFICATIONS	
Working Height (m)	12
Horizontal reach (m)	6
Platform basket capacity (Kg)	250 (2man)
Platform weight (Kg)	850
Stabilizers	2 sets of hydraulic stabilizers with leg lock valve (truck dependent)
Rotation	360 degree non-continuous
Stabilizers	4x hydraulic extendable stabilizers with leg lock valve
Rotation	360 degree non-continuous
Power source	Power take off driven

- Hydraulic operated control valve from both the ground and in the cage
- Emergency stop at upper & lower controls
- Upper & Lower controls - Standard control valve mounted onto basket & turrent
- Interlocking system to prevent the oper on of the booms without the outriggers been lowered (SANS 16368)
- Emergency system - Manual Pump

DESIGNED AND FABRICATED ACCORDING TO SANS 16368

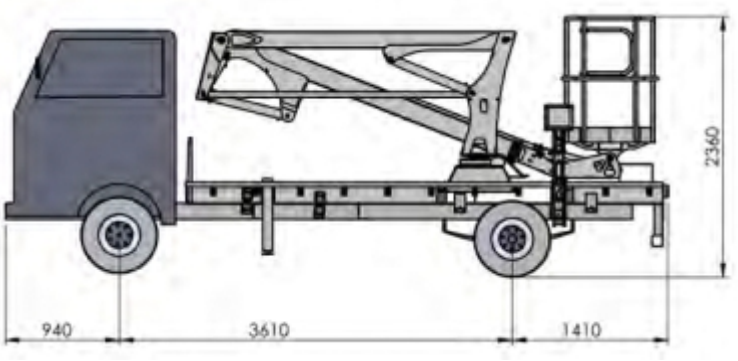

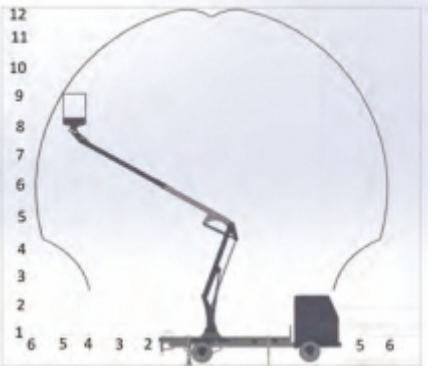

PG-E ZA-AC 1206 TK/29-10-19/RVAB

hyva.com

HYVA SOUTHERN AFRICA (PTY) LTD.
178 Barbara Rd, Rietfontein 63-Ir, Germiston, 1401, Johannesburg, South Africa
T: +27 (0) 11 822 1446, E: enquiries.sa@hyva.com